



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

**98112501.6**

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr:  
Application no.: 98112501.6  
Demande no:

Anmeldetag:  
Date of filing: 06.07.98  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

**SONY International (Europe) GmbH**

Hugo-Eckener-Str. 20  
D-50829 Köln

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method to perform a scheduled action of network devices

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H02J13/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU MC NL PT SE

As requested, the entries pertaining to the applicant of the above-men-  
tioned European patent application/to the proprietor of the above-men-  
tioned European patent have been amended to the following:

Sony International (Europe) GmbH  
Kemperplatz 1  
10785 Berlin/DE

**- 5.04.00**

The registration of the changes has taken effect on .....

# MÜLLER & HOFFMANN - PATENTANWÄLTE

Frithjof E. Müller, Dipl.-Ing.  
Jörg Peter Hoffmann, Dr.-Ing.

Innere Wiener Strasse 17  
D - 81667 München

Attorney's File: 51.250

Mü/Gö/kx

Applicant's Case: S98P5062EP00/PAE98-049ERDS

06.07.1998

**SONY International (Europe) GmbH**

Hugo-Eckener-Str. 20

**D-50829 Köln**

---

**Method to Perform a Scheduled Action of Network Devices**

---

**Description**

- 1 This invention concerns a method to perform a scheduled action of devices that are connected via a network.

Usually in consumer electronics home networks, e.g. an IEEE 1394 based  
5 home network, a clock device triggers all other devices. All devices receive this trigger command at the same time and should start at the same time.

Scheduled action in the contents of the present invention always means that  
predetermined actions of predetermined devices should be performed  
10 synchronous at a predetermined time.

Normally a network, like a home network, comprises different devices and due to their individual constructions every device needs a different start-up time. E.g. a VCR mechanic has to move the tape into position or a tuner has to move  
15 the dish to the desired satellite and to tune to the transponder. Therefore, in the conventional home network every device will start its action at a different time and therefore the invoking application will not be started synchronously at all devices and also not exactly at the predetermined time.

20 Therefore, it is the object of the present invention to offer a method to perform a scheduled action of devices that are connected via a network with a synchronous start according to the invoking application.

The inventive method to perform a scheduled action of the devices that are  
25 connected via a network is characterized in that an individual triggering time is calculated for every device that should perform a predetermined action at a predetermined time.

Due the calculation of not one triggering time for all devices participating in  
30 the scheduled action like in the prior art, but of an individual triggering time for every device all different start-up times of the individual devices are taken into account and it is possible to start a predetermined action of a predetermined device really at a predetermined time and not at said predetermined time plus the start-up time of the respective device.

- 1 Advantageous embodiments of the present invention as defined in independent claim 1 are respectively defined in dependent claims 2 to 11.

One exemplary advantageous embodiment of the present invention will be  
5 described in detail below with reference to Fig.1 which illustrates one specific embodiment of the present invention and shows the messages between different network devices that are exchanged according to the invention to perform a scheduled action of several devices so that the invoking application is started simultaneously at all participating devices.

10

An invoking application 1 programs the resource manager 2 that is present in the network with a scheduled action in a first step S1. Such an invoking application 1 can e.g. be based on an user command to record a predetermined program that can be received by a tuner present in the network with a VCR also  
15 present in said network. The invoking application 1 programs the tuning of the tuner to said predetermined program at a predetermined time and the starting of the VCR-recording at said predetermined time into the resource manager 2 as well as the switching-off of the tuner and the VCR simultaneously after the program has been recorded.

20

In the following steps, here steps S2 and S3 the resource manager 2 transfers the respective start/stop command list and said predetermined time to the various devices that are needed for the respective programmed scheduled action. In the shown example the start time 10:15:00 is transferred together with  
25 the individual start/stop command list to device A 3 that has a start-up time of 10 seconds in step S2 and together with the individual start/stop command list to device B 4 that has a start-up time of 15 seconds in step S3. device A 3 can e.g. be a VCR whose mechanic needs 10 seconds to move the loaded tape into the correct position and the device B 4 could be a tuner that needs 15  
30 seconds to move its dish to the desired satellite and to tune its transponder.

The individual start-up time is dependent on the respective device. According to the present invention, it is also possible that one device has different start-up times for different actions to be performed. After a respective device  
35 receives the start/stop command list that describes the predetermined action to be performed the device can look up the start-up time needed for this action in a look-up table that can be based on the worst case start-up times of the

- 1 respective device or it can determine the start-up time on the basis of the  
current state of the respective device, e.g. how far a tuner has to move its  
satellite dish depending on the current position. It is also possible that the  
start-up time is generated on a combination of the worst case start-up time  
5 and the current state of the respective device. The setting of a too high start-  
up time is not desirable, since several scheduled actions with only small time  
differences at one device might then more easily conflict.

When a device has received a start/stop command list and a predetermined  
10 time at which the command described in the start/stop command list should  
be executed or cancelled and has generated its individual start-up time for this  
respective command it calculates an individual triggering time at which it  
should be triggered to have enough time to prepare itself and start exactly at  
the time the scheduled action should start. Therefore, the individual start-up  
15 time is subtracted from the predetermined time of the scheduled action which  
is then transmitted to a clock device 5 of the network which serves as a trig-  
ger. In the shown example, the device A 3 transmits its individual triggering  
time 10:14:50 in step S4 to the clock device 5 and the device B 4 transmits its  
individual triggering time 10:14:45 in step S5 to the clock device 5.

20

In the following the clock device 5 triggers the device B 4 in a step S6 at the  
time it has been programmed to trigger said device B 4 and in a step S7 at a  
time it has been programmed to trigger said device A 3. Therefore, every device  
A 3 and B 4 is triggered at an individual time so that it has enough time to  
25 prepare itself and start exactly at the time the respective scheduled action  
should start.

Of course, it is also possible that the individual triggering times are not calcu-  
lated by every device A 3 or B 4 itself, but by the clock device 5 or by another  
30 device provided therefore in the network. Therefore, the clock device 5 or the  
other device has to know the individual start-up time of the respective devices  
or of the respective commands that should be executed in the respective de-  
vices and the predetermined time that is set for the scheduled action. The  
functionality of the other device can also be included in the recourse manager  
35 2.

It is also possible that every device has an internal clock to trigger its device at

- 1 its individual triggering time. In this case every internal clock device has to be  
somehow synchronized with the clock device 5 of the network.

As can be seen from the above exemplary embodiment of the present inven-  
5 tion, the resource manager 2 does not directly instruct the clock device 5 by  
himself. Every device A 3, B 4 knows its own start-up time, e.g. the worst case  
start-up time, and instructs the clock device 5 for the individual triggering  
command that is calculated according to the predetermined time at which the  
scheduled action should take place and the individual start-up time of the re-  
10 spective device or the respective command of the respective device. The general  
triggering command according to the prior art is individually preset with the  
start-up time of a respective device so that the device has enough time to pre-  
pare itself and start exactly at the time the scheduled action should take place  
after reception of the triggering command. Such an individually preset trigger-  
15 ing command is generated for every involved device.

The present invention is preferably executed in a home network in which it is  
desired by the user that various actions should take place at exactly the same  
time, e.g. the tuner of the home network has to receive a desired program at  
20 exactly the time the user wishes to record said program with a VCR and vice  
versa the VCR has to start its recording at exactly the same time the program  
begins. Preferably, such a home network is a 1394 based home network.

25

30

35

---

**Claims**

- 1    1.    Method to perform a scheduled action of devices (3, 4) that are connected  
via a network, **characterized in that** an individual triggering time is calculated  
for every device (3, 4) that should perform a predetermined action at a predeter-  
mined time.
- 5    2.    Method according to claim 1, **characterized in that** said individual trig-  
gering time is calculated based on the synchronous start time of said scheduled  
action and an individual start-up time that the respective device (3, 4) needs to  
perform said predetermined action.
- 10    3.    Method according to claim 1 or 2, **characterized in that** the individual  
start-up time a respective device (3, 4) needs to perform said predetermined ac-  
tion is determined on the basis of the worst case start-up time the respective  
device (3, 4) needs to perform said predetermined action.
- 15    4.    Method according to anyone of claims 1 to 3, **characterized in that** the  
individual start-up time a respective device (3, 4) needs to perform said prede-  
termined action is determined on the basis of the current state of the respective  
device (3, 4).
- 20    5.    Method according to anyone of claims 1 to 4, **characterized in that** a re-  
source manager (2) of the network respectively transmits said predetermined ac-  
tion and said predetermined time of said scheduled action to each device (3, 4)  
that should perform said predetermined action at said predetermined time.
- 25    6.    Method according to anyone of claims 1 to 5, **characterized in that** every  
device (3, 4) calculates its individual triggering time itself.
- 30    7.    Method according to claim 6, **characterized in that** every device (3, 4)  
sets an internal clock with the calculated individual start-up time that triggers  
said device (3, 4) at its individual triggering time.
8.    Method according to claim 6, **characterized in that** every device (3, 4)  
transmits said triggering time to a clock device (5) of the network.



1     9.     Method according to anyone of claims 1 to 4, **characterized in that** a re-  
source manager (2) of the network respectively transmits said predetermined ac-  
tion and said predetermined time of said scheduled action for every device (3, 4)  
that should perform said predetermined action at said predetermined time to a  
5     clock device (5) of the network or an other device in the network and respec-  
tively said predetermined action to the respective device (3, 4), and every device  
(3, 4) that should perform said predetermined action at said predetermined time  
transmits its individual start-up time needed to perform the predetermined ac-  
tion to said clock device (5) or to that other device.

10

10.     Method according to claim 9, **characterized in that** said clock device (5)  
or that other device calculates the individual triggering time for every device (3,  
4).

15     11.     Method according to claim 10, **characterized in that** said other device  
transmits its calculated triggering times for every device (3, 4) to said clock de-  
vice (5).

20     12.     Method according to anyone of claims 9 to 11, **characterized in that** said  
other device can also be the resource manager (2).

13.     Method according to anyone of claims 8 to 12, **characterized in that**  
said clock device (5) triggers said device (3, 4) at its individual triggering time.

25     14.     Method according to anyone of claims 1 to 13, **characterized in that** said  
network is a home network.

15.     Method according to anyone of claims 1 to 14, **characterized in that** said  
network is a 1394 based network.

30

16.     Method according to anyone of claims 1 to 15, **characterized in that** said  
device (3, 4) is a consumer electronic device.

35

**Abstract****Method to Perform a Scheduled Action of Network Devices**

The present invention offers a method to perform a scheduled action of devices (3, 4) that are connected via a network by calculating an individual triggering time for every device (3, 4) that should perform a predetermined action at a predetermined time. This individual triggering time is calculated based on the synchronous start time of said respective scheduled action and an individual start-up time of the respective device (3, 4) participating in said scheduled action.

(Fig. 1)

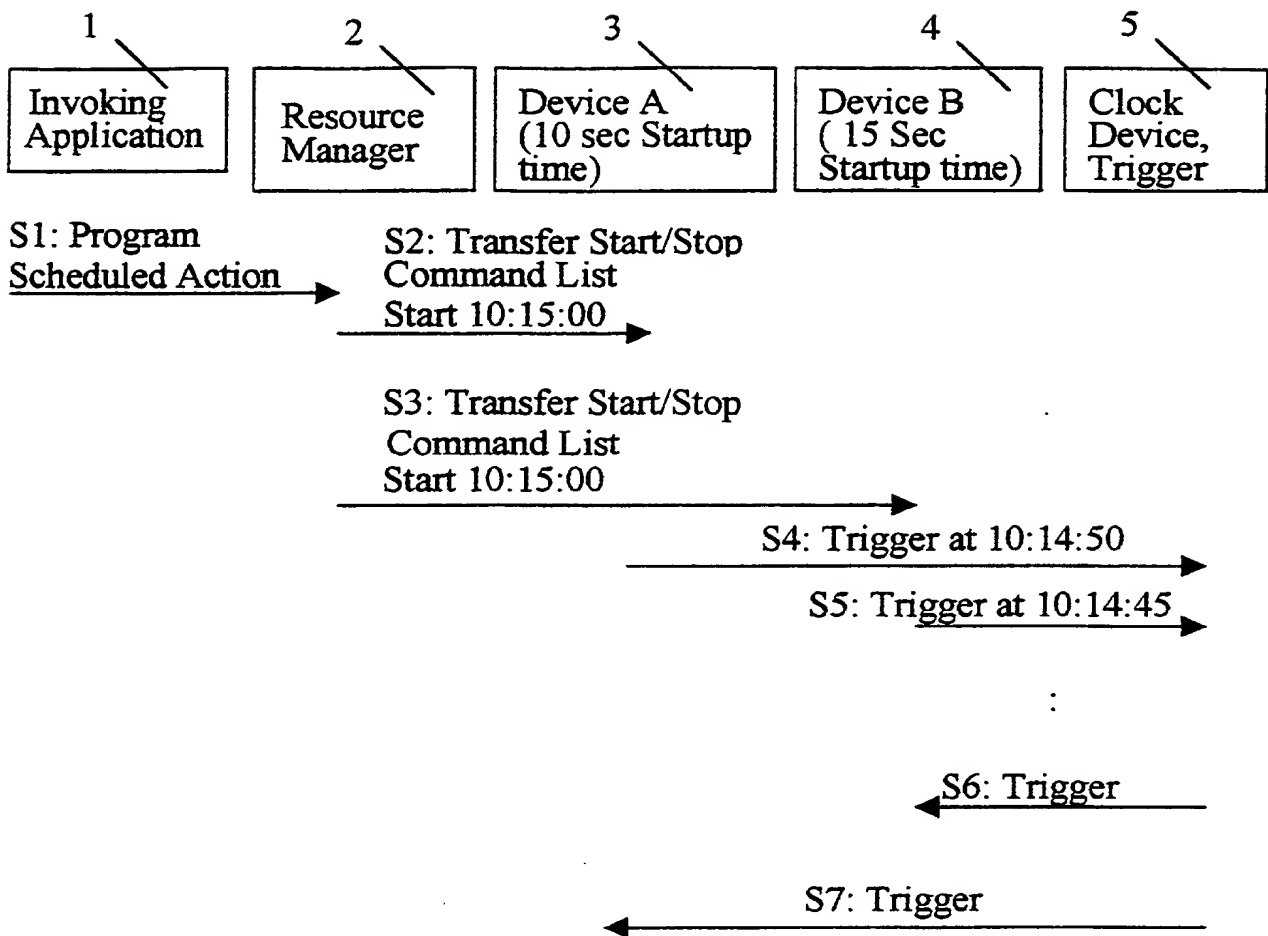


Fig. 1